

Band Knife machines

Model SV/BK-750




SV/BK-750 with air flow table and electronic variable speed.

Model SV/BK-1100



SV/BK-1100 with air flow table and electronic variable speed.

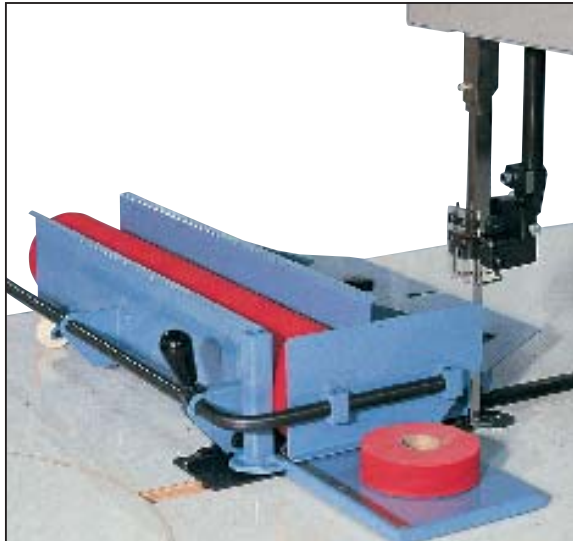

Optional roll cutting device

Economic price-alternative to cut tapes, accuracy is depending on fabric/cardboard core.

Some features:

- Automatically set band knife guard.
- Automatic band knife tension
- Warning light indicates bandknife running.
- Automatic safety stop for band knife breakage.
- All panels are safety switch protected.
- Dove-tail guided band knife sharpening unit.
- Band knife blade made of high grade steel.
- Upper and lower guide bearings.
- Casters.

Technical data

SV/BK-750

SV/BK-1100

Technical data	SV/BK-750	SV/BK-1100
Cutting capacity	20 cm (8")*	20 cm (8")*
Gap between knife and body	75 cm (30")	110 cm (43")
Table dimension	180x150 cm (6x5 ft)	200x180 cm (7x6 ft)
Machine height adjustable	82-85 cm (32-33")	82-85 cm (32-33")
Length of band knife	3795 mm (148")	4435 mm (175")
Band knife speed – 2 speed	Standard 8/16 m/s (26/52 ft/s)	Standard 8/16 m/s (26/52 ft/s)
Electric motor	1,0/1,35 kW	1,0/1,35 kW
Voltage	230/400 V	230/400 V
Floor space	190x180 cm (6x6 ft)	245x180 cm (8x6 ft)
Net weight	180 kg (396 lbs)	200 kg (440 lbs)
Options	Air flow table Electronic variable speed Roll cutting device Upper guide auto lifter Auto sharpener	Air flow table Electronic variable speed Roll cutting device Upper guide auto lifter Auto sharpener

* For very soft materials, max. cutting height (table-shield) is 28 cm (11").

Svegea of Sweden AB • Junogatan 5 • SE-451 42 Uddevalla • Sweden
Phone +46 522 368 00 • Fax +46 522 333 99 • E-mail: info@svegea.se
web-site: www.svegea.se

Specifications and appearance are subjekt to change without prior notice for improvements.